

Brand New Exquisite Panel

Simple & Elegant



CASSETTE AIR CONDITIONER SERIES




FRESH AIR INTRODUCE

Improve indoor air freshness.



EASY -TO-CLEAN FILTER

Effectively filter harmful particles.

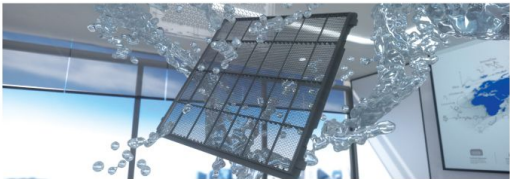

360° ROUND FLOW

Uniform temperature distribution.




BIG LOUVER

With 88° free swinging angle.



GOLDEN FIN

The unique anticorrosive golden fin can withstand the salty air, rain and other corrosive elements. Also, it is high end stylish and more attractive than normal fin.

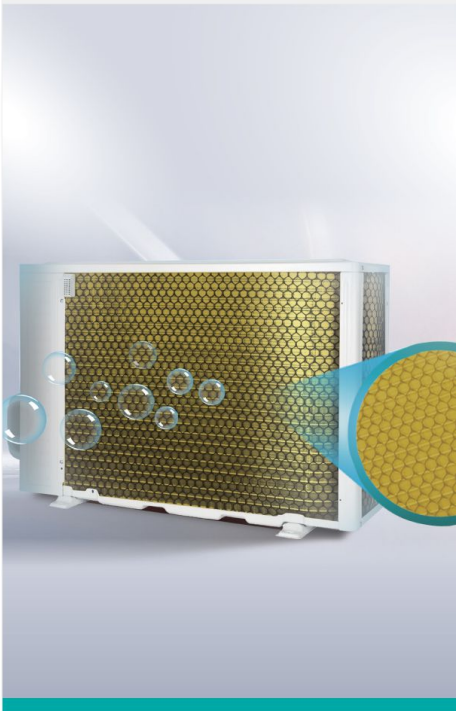

BACKWARD CENTRIFUGAL FAN

With excellent air supply, high efficiency, low noise and loss, high reliability.

FIVE-FOLD EVAPORATOR

Larger heat exchange area, higher efficient, more power-saving than traditional four-fold evaporator.


SLIM DESIGN

236mm ultra-thin body slim and saves more space.



FLEXIBLE INSTALLATION



Anti-overflow design and high-lift water pump, pipeline installation is more flexible.

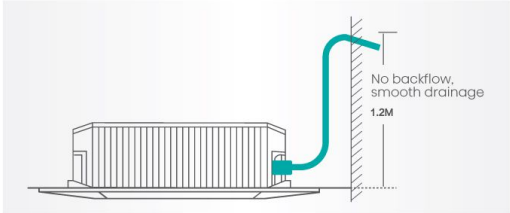

ANTIBACTERIAL MODULE


Antibacterial module can effectively purify condensed water and provide more comfortable and healthy air.

* Optional

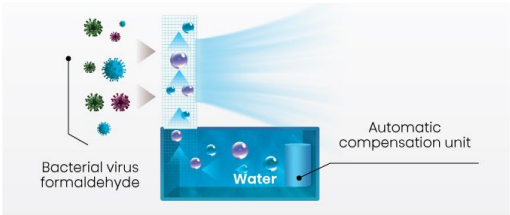

MODEL		AUC50QFGS	AUC45QFGS	AUC40QFGS	AUC35QFGS	AUC25QFGS	AUC20QFGS
Indoor model		AUC-48CR4RKA AUW-48CGREI	AUC-42CR4RKA AUW-42CGRE	AUC-36CR4RKA AUW-36C4RD	AUC-30CR4RKA AUW-30C4RB	AUC-24CR4RKA AUW-24C4RB	AUC-18CR4RKA AUW-18C4RM
Outdoor model							
Power supply	V-ph-Hz	380 ~ 415-3-50	380 ~ 415-3-50	220 ~ 240-1-50	220 ~ 240-1-50	220 ~ 240-1-50	220 ~ 240-1-50
Power factor		0.9	0.90	0.98	0.97	0.98	0.98
Rated consumption	W	4280	3600	3245	2582	2215	1700
Rated current	A	7.8	6.8	14.7	11.5	9.8	7.5
Cooling	Capacity T1	Btu/h	49500	44880	37425	32800	26000
Indoor air flow rated (H/L/Med/Lc)	m ³ /h	2000/1850/1550	2000/1850/1550	2000/1850/1550	2000/1850/1550	1300/1200/1050	1300/1200/1050
Indoor noise level (H/L/Med/Lc)	dB(A)	55/53/50	55/53/50	55/53/50	55/53/50	45/42/40	45/42/40
Indoor unit	Dimension (W×H×D)	mm	840 × 272 × 840	840 × 272 × 840	840 × 272 × 840	840 × 236 × 840	840 × 236 × 840
	Packing (L×W×H)	mm	950 × 950 × 360	950 × 950 × 360	950 × 950 × 360	950 × 950 × 320	950 × 950 × 320
	Net/Gross weight	kg	28.0/34.5	28.0/34.5	28.0/34.5	23.5/29.0	23.5/29.0
Operation temperature	°C	16 ~ 46	16 ~ 46	16 ~ 46	16 ~ 46	16 ~ 46	16 ~ 46
Outdoor noise level (sound pressure)	dB(A)	56	56	58	56	56	53
Outdoor unit	Dimension (W×D×H)	mm	950 × 340 × 1050	950 × 340 × 1050	885 × 366 × 715	860 × 310 × 665	860 × 310 × 665
	Packing (L×W×H)	mm	1110 × 460 × 1200	1110 × 460 × 1200	1050 × 500 × 890	995 × 720 × 420	910 × 600 × 360
	Net/Gross weight	kg	80/91	77/88	65/70	54/57	46/49
							34/36

INSTALLATION DIMENSIONS

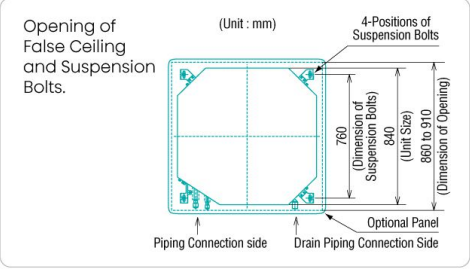

MOUNTING POSITION OF INDOOR UNIT

*I*Indicates the dimension between lower face of indoor unit and surface of ceiling.

